



Code-Point[®]

User guide and technical specification

Code-Point

User guide

Contents

Section	Page no
Preface	3
Contact details	3
Use of the product.....	3
Purpose and disclaimer	3
Copyright.....	3
Data copyright and other intellectual property rights	4
Trademarks	4
Back-up provision of the product	4
Using this guide.....	4
Chapter 1 Introduction	5
Using this user guide	5
Code-Point features	5
Applications of Code-Point.....	5
Chapter 2 Overview of Code-Point	6
Data overview	6
Basic principles	7
Application overview	7
Uses of Code-Point.....	7
Scenarios	8
Chapter 3 Code-Point explained	9
Postcode	9
Format.....	9
Position	9
Code-Point location coordinate (CPLC).....	9
Positional quality indicator (PQI).....	9
Administrative and health authority codes.....	11
Chapter 4 Creating single-space postcodes	12
Centroids only	12
Outward and inward bound representation	12
Single-space postcodes.....	12
CSV single-space postcodes using Microsoft Excel.....	12
MID/MIF and TAB single-space postcodes using MapInfo.....	12
Shapefile single-space postcodes using ESRI ArcGIS	14
Annexe A Product and service performance report form	16

v2.5 – 08/2008

D05300_24

Preface

This user guide (hereafter referred to as the guide) is designed to provide an overview of Code-Point (hereafter referred to as the product). If you find an error or omission in this guide, or otherwise wish to make a comment or suggestion as to how we can improve the guide, please contact us at the address shown below under contact details or complete the product and service performance report form at [annexe A](#) and return it to us.

Contact details

Our Customer Service Centre will be pleased to deal with your enquiries:

Customer Service Centre
Ordnance Survey
Romsey Road
SOUTHAMPTON
SO16 4GU

General enquiries (calls charged at local rate): +44 (0)8456 05 05 05

Dedicated Welsh Language HelpLine: 08456 05 05 04

Textphone (deaf and hard of hearing users only please): +44 (0)23 8079 2906

Email: customerservices@ordnancesurvey.co.uk

or visit the Ordnance Survey website at: www.ordnancesurvey.co.uk.

This document has been screened in accordance with the requirements set out in Ordnance Survey's Equality Scheme. If you have difficulty reading this information in its current format and would like to find out how to access it in a different format (Braille, large print, computer disk or in another language), please contact us on: +44 (0)8456 05 05 05.

Use of the product

The terms and conditions upon which the product, including this guide, is made available to you and your organisation are contained in the customer contract made between you and Ordnance Survey. If there is an inconsistency between the terms of your customer contract and this guide, then the terms of your customer contract prevail. If you or your organisation has not signed a valid current customer contract then you are not entitled to use the product.

Purpose and disclaimer

This guide is provided for guidance only and does not constitute any warranty, representation, undertaking, commitment or obligation (express or implied) about the product or its suitability for any particular or intended purpose. Any warranties, representations, undertakings, commitments and obligations given by Ordnance Survey about the product and/or its suitability for any particular or intended purpose are set out in your customer contract. It is your responsibility to ensure that this product is suitable for your intended purpose.

Ordnance Survey does not accept any liability (whether for breach of contract, negligence or otherwise) for any loss or liability you or any third party may suffer in relying on this guide and any guidance, suggestion, advice or explanation provided in it. Any liability that Ordnance Survey has to you in relation to the product, its supply, use, accuracy, data supplied, functionality or any other liability arising out of or in connection with the product is limited as set out in your customer contract.

We may change the information in this guide at any time without notice.

We do not accept responsibility for the content of any third party websites referenced or accessed in or through this guide, any contractual documentation, and/or the Ordnance Survey website.

Copyright

This guide (including for the avoidance of doubt any mapping images reproduced herein), is © Crown copyright 2008. All rights reserved.

Any part of this guide may be copied for use internally in your organisation or business so that you can use the product for the purpose for which it is licensed to your organisation or business (but not otherwise).

No part of this guide may be reproduced or transmitted in any form or by any means (including electronically) for commercial exploitation without the prior written consent of Ordnance Survey.

No part of this guide may be copied or incorporated in products, services or publications that you generate for onward sale, or as free promotional or support materials, without the prior written consent of Ordnance Survey.

Data copyright and other intellectual property rights

The Crown (or, where applicable, Ordnance Survey's suppliers) owns the intellectual property rights in Ordnance Survey digital map data.

Full details of the terms and conditions under which Ordnance Survey digital map data may be processed and/or manipulated or copied by a customer – whether or not for use on PCs or workstations or for making hard copies – are available from the Customer Service Centre, please see [contact details](#). You should check the terms and conditions with us before using the data. It is also the responsibility of the holder of the digital map data to ensure that any plotted or printed output contains the required copyright and database acknowledgements in a conspicuous position.

The product makes use of Royal Mail PAF files and Postzon, OSNI, ONS and GROS health authority codes.

Trademarks

Ordnance Survey, the OS Symbol, ADDRESS-POINT, Code-Point, Gridlink, Land-Line, Land-Line.Plus and OS MasterMap are registered trademarks and Boundary-Line is a trademark of Ordnance Survey, the national mapping agency of Great Britain.

Adobe and Acrobat Reader are registered trademarks of Adobe Systems Incorporated.

ArcGIS and ESRI are registered trademarks of Environmental Systems Research Institute, Inc.

NHS is a trademark of the Department of Health.

MapInfo is a registered trademark of MapInfo Corporation.

Microsoft and Excel are registered trademarks of Microsoft Corporation.

Ordnance Survey of Northern Ireland and OSNI are registered trademarks of Ordnance Survey of Northern Ireland.

PAF, Post Office, Postzon and Royal Mail are registered trademarks of Royal Mail Group plc.

Pentium is a registered trademark of Intel Corporation.

Back-up provision of the product

You are advised to copy the supplied data to a back-up medium.

Using this guide

The documentation is supplied in portable document format (PDF) only. Free Adobe® Acrobat Reader® software, which displays the guide, incorporates search and zoom facilities and allows you to navigate within. Hyperlinks are used to navigate between associated parts of the guide and to relevant Internet resources by clicking on the blue hyperlinks and the table of contents.

The guide provides an introduction to the structure and content of the product and assumes a general knowledge of geographic information. It also gives guidelines and advice on how a customer might derive the maximum benefit from the product.

If you are unfamiliar with any words or terms used and require clarification please refer to the glossary at the end of the document.

Chapter 1 Introduction

Using this user guide

A glossary of words and terms used in this user guide can be found at [annexe A](#).

Code-Point features

With each coordinated point, Code-Point products provide:

- information about the number and type of postal delivery points in the postcode;
- a positional quality indicator (PQI), which indicates the quality of the data underlying the Code-Point location coordinate (CPLC);
- the country indicator (either England, Scotland, Wales or Northern Ireland);
- the postcode type;
- the National Health Service region and area codes; and
- the local government county, district and ward codes.

Applications of Code-Point

Code-Point can be used to display and analyse any data collected at the postcode level. This has led to the product being widely used in a variety of applications, including:

- site location;
- market analysis and profiling;
- health and epidemiology;
- resource allocation;
- socio-economic profiling; and
- sales targeting.


Chapter 2 Overview of Code-Point

Data overview

Code-Point is recreated quarterly using updates from Ordnance Survey field surveys and Gridlink® (a consortium made up of Royal Mail®, Ordnance Survey, the Office of National Statistics (ONS), Ordnance Survey of Northern Ireland® (OSNI®) and the General Register Office for Scotland (GROS)), via ADDRESS-POINT® and Boundary-Line™.

ADDRESS-POINT contains postal address data for 27 million postal delivery points. These delivery points may be premises that are shown in Land-Line® data, such as buildings, or they might be features that do not form part of the Land-Line specification such as PO boxes, caravan parks, buildings under railway arches, temporary buildings and houseboats. All postcode units in PAF® (Postcode Address File) at the time of creation, which have valid and current postal delivery points, will be in Code-Point.

Example of Code-Point data (when viewed through a GIS package)

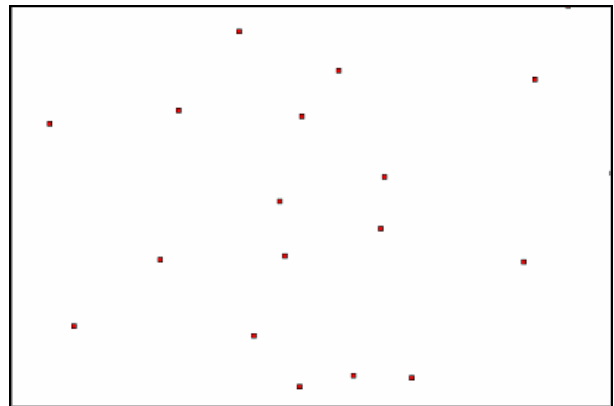

Example of Code-Point browser (when viewed through a GIS package)

Postcode	Legend	Positional_Quality	PO_Box_Indicato	Total_Delivery_Point	Delivery_Points_Sam	Domestic	NonDomestic	PO_Bo	Matched_Addres:	Unmatched_Delivery_F	NHS_Regional_Co
<input type="checkbox"/> AB10 1A#	Accurate to b1g, auto	10	N	1	1	0	1	0	1	0	S00
<input type="checkbox"/> AB10 1AF	Accurate to b1g, auto	10	N	1	1	0	1	0	1	0	S00
<input type="checkbox"/> AB10 1AC	Accurate to b1g, auto	10	N	1	1	0	1	0	1	0	S00
<input type="checkbox"/> AB10 1AH	Accurate to b1g, auto	10	N	1	1	0	1	0	1	0	S00
<input type="checkbox"/> AB10 1AJ	Accurate to b1g, auto	10	N	2	2	0	2	0	2	0	S00
<input type="checkbox"/> AB10 1AL	Accurate to b1g, auto	10	N	1	1	0	1	0	1	0	S00
<input type="checkbox"/> AB10 1Ah	Accurate to b1g, auto	10	N	3	3	2	1	0	2	0	S00
<input type="checkbox"/> AB10 1AP	Accurate to b1g, auto	10	N	2	2	0	2	0	2	0	S00
<input type="checkbox"/> AB10 1AG	Accurate to b1g, auto	10	N	1	1	0	1	0	1	0	S00
<input type="checkbox"/> AB10 1AR	Accurate to b1g, auto	10	N	1	1	0	1	0	1	0	S00
<input type="checkbox"/> AB10 1AS	Accurate to b1g, auto	10	N	1	1	1	0	0	1	0	S00

Example of Code-Point overlaid on to OS MasterMap®

NOTE: to use Code-Point in this way requires a separate GIS package with the relevant licences.



Basic principles

- Each postcode unit will be allocated a National Grid reference (NGref) of a point that falls within the notional extent of the postcode unit – there may be a small number of instances where coordinates cannot be allocated.
- *NOTE: data in the BT (Northern Ireland) Postcode Area is geo-referenced to the Irish National Grid. Therefore, when loading BT into a GIS you should select the Irish Transverse Mercator Grid for the correct projection. If you do not apply the Irish projection the BT centroid points will not be correctly positioned. For additional information relating to the Irish Grid: http://www.osni.gov.uk/2.1_the_irish_grid.pdf*
- Multiple postcodes in a single block of flats or offices will share one NGref – these may be either large users or small users, or both.
- Administrative area codes are allocated using the Boundary-Line polygon that the CPLC falls within; currency is that of the latest available Boundary-Line data. Where addresses in a postcode fall in two or more administrative areas, only the codes for the area in which the CPLC falls are given.
- NHS codes are allocated using the premise that NHS areas are always supersets of administrative areas.

Application overview

Uses of Code-Point

Code-Point forms a nationally consistent postcode reference and is a standard link between databases and GIS. Identified below are some of the applications for Code-Point:

Citizen services

Web site searches
Location finding
Tourism
Accessing public facilities

Government

Statistical demographic analysis
Crime analysis
Flood warnings
Pollution monitoring

Health

Targeting of services to population needs
Resource allocation
Epidemiology
Analysis of *What if...?* scenarios

Insurance

Market analysis and profiling
Geological and flood-risk analysis
Personal and household risk assessment
Incident area management

Retail

Sales analysis by store
Competitor analysis
Customer buying profiles
Store location
Targeting promotions

Transport

Routing
Satellite navigation – end to end journey planning

Utilities

Market profiling
Consumption analysis
Pressure-zone analysis
Location finding

Scenarios

Medical research for health authorities

It is necessary for health authorities to be able to analyse and identify the effects and potential implications of contamination. Is the incidence of bronchitis uneven throughout a health authority's area?

Customer survey for market-research purposes

A questionnaire has been distributed to all houses within a large geographical area. The results and the relationships between groups of customers need to be analysed.

Incident analysis for emergency services

An ambulance service wishes to assess the efficiency and value of various mobile unit locations in reducing call-response times.

Insurance for financial services

An insurance company has been asked to quote structural insurance for a potential customer within the Southampton (SO) area. SO has been labelled, geographically, as a clay area and therefore insurance companies could charge higher premiums because of the potentially higher incidence of subsidence.

Chapter 3 Code-Point explained

Postcode

Postcodes are an alphanumeric abbreviated form of address. Postcode units are unique references and identify an average of 15 addresses. In some cases, where an address receives a substantial amount of mail, a postcode will apply to only one address (a large user postcode). The maximum number of addresses in a postcode is 100.

The postcode is held in Code-Point as a seven character field. Although, when used in an address, the inward code (incode) should be separated from the outward code (outcode) by a single space, within Code-Point data there may be 0, 1 or 2 spaces between these elements of the postcode. The following is a list of the valid formats of postcode held. An A indicates an alphabetic character, an N indicates a numeric character.

Format

Outcode	Incode	Example postcode	Example as held in Code-Point
AN	NAA	M2 5BQ	M2 5BQ
ANN	NAA	M34 3AB	M34 3AB
AAN	NAA	DN5 7XY	DN5 7XY
AANN	NAA	DN16 9AA	DN169AA
ANA	NAA	W1A 4WW	W1A 4WW
AANA	NAA	EC1A 1HQ	EC1A1HQ

Postcode example

Area	District	Sector	Unit
KY	12	8	UP

Please refer to the glossary for a further description of [postcode](#).

Position

Code-Point location coordinate (CPLC)

Code-Point provides an NGref, to a resolution of 1 metre, for each postcode unit in Great Britain and Northern Ireland, and is known as the CPLC. A CPLC is normally allocated to a point that falls within the extent of the postcode unit. The point is given the ADDRESS-POINT coordinates of the nearest delivery point to the calculated mean position of the delivery points in the unit. A lower positional quality CPLC will be allocated to postcode units awaiting a surveyed position, or which relate to addresses that will not have a surveyed position.

Where several postcode units apply to one surveyed position, for example, a block of flats or offices, there is an identical CPLC for each. However, there may be instances where the CPLC position is imprecise or approximate due to the manual allocation by Royal Mail of a postcode outside the recognised geographical extent of that postcode.

When discovered or notified to Ordnance Survey by customers (using [annexe A](#)), these will be referred to Royal Mail for possible improvement.

Positional quality indicator (PQI)

The importance of checking the PQI, to establish CPLC positional quality, cannot be overemphasised.

It indicates the positional accuracy of the Code-Point coordinates. There are seven PQI values for the positional quality of CPLCs. The order shown indicates the level of quality associated with the PQI, PQ10 is the most accurate and PQ90 the least. The PQI assigned to the CPLC will depend on the coordinates available in ADDRESS-POINT to generate the CPLC. If the ADDRESS-POINT PQI is PQ3 then the Code-Point PQI will be PQ10.

PQI Description of source ADDRESS-POINT data

- 10 Within the building of the matched address closest to the postcode mean determined automatically by Ordnance Survey or Ordnance Survey of Northern Ireland (OSNI)(BT postcode area only).
- 20 As above, but determined to visual inspection by GROS (General Register Office for Scotland).
- 30 Approximate to within 50 m of true position (postcodes relating to developing sites may be within 100 m of true position).
- 40 The mean of the positions of addresses previously matched in ADDRESS-POINT but which have subsequently been deleted or recoded (very rarely used).
- 50 Estimated position based on surrounding postcode coordinates, usually to 100 m resolution, but 10 m in Scotland.
- 60 Postcode sector mean (direct copy from ADDRESS-POINT). See [glossary](#) for additional information.
- 90 No coordinates available.

Attributes

Attribute	Description
Postcode	Contains elements for postal area, district, sector and unit. See Postcode in this chapter.
Positional quality	Indicates the source of the data indicator used and, hence, the quality of the coordinates provided for each record. It is determined by the best available data in ADDRESS-POINT (not applicable to Northern Ireland (BT area)).
PO box indicator	Denotes if the postcode is a PO box.
Total delivery points	The total number of both matched and unmatched delivery points in the postcode. Not in BT data for Northern Ireland.
Delivery points used to the CPLC where the PQI value is 10 or 20	Number of matched addresses in the postcode unit of the same positional quality in ADDRESS-POINT as the PQI for that postcode in Code-Point, provided that the Code-Point record has a PQI value of 10 or 20. Not in BT data for Northern Ireland.
Domestic delivery points	Number of non-PO box delivery points that have no PAF organisation name. Not in BT data for Northern Ireland.
Non-domestic delivery	Number of non-PO box delivery points that have a PAF organisation name. Not in BT data for Northern Ireland.
PO box domestic delivery points	Number of PO box delivery points. Not in BT data for Northern Ireland or where PQI is 20 in Scotland.
Matched addressed premises	Number of PQ3 ADDRESS-POINT delivery points in buildings or building subdivisions, after exclusion of duplicated coordinate pairs. Not in BT data for Northern Ireland or where PQI is 20 in Scotland.
Unmatched delivery points	Number awaiting improvement to PQ3 ADDRESS-POINT. Not in BT data for Northern Ireland or where PQI is 20 in Scotland.
Easting	Distance in metres east of National Grid origin.
Northing	Distance in metres north of National Grid origin.
Country code	Code used by ONS to identify the country in which the Code-Point georeference lies. See glossary .
NHS regional health authority code	NHS region in which CPLC falls.
NHS health authority code	NHS area in which CPLC falls.
Administrative county code	County in which CPLC falls.
Administrative district code	District in which CPLC falls.
Administrative ward code	Ward in which CPLC falls.
Postcode type	Indicates whether the user is large, L, or small, S. Large postcode type users receive in excess of 500 pieces of mail. Small users receive 70 pieces of mail per day.

Administrative and health authority codes

Administrative and health authority codes allocation to postcode is by point in polygon comparison against Boundary-Line data.

For administrative/NHS codes a look-up table in Gridlink is used.

In the case of unitary authorities, 00 is given for administrative county; the authority code appears as the district code.

Where a district or unitary authority is divided into electoral districts, the code appears as the ward code. Postcodes with a PQI of 90 or 60 are not allocated codes.

Lineage

Code-Point is derived from Gridlink data – ADDRESS-POINT, which was initially created from a comparison of the Royal Mail Postal Addressing File (PAF), Land-Line and the ROADS database datasets from Ordnance Survey and administrative and national health area codes created by ONS, OSNI and GROS, but allocated using Ordnance Survey Boundary-Line data and positioned with an Ordnance Survey NGref.

It also contains the BT postcodes for Northern Ireland, locations for which are supplied by OSNI.

Currency

Currency is a measure of the real world change included in Code-Point. Monthly postcode updates from the Royal Mail Postzon® and PAF, and inputs received from ONS, GROS and OSNI, together with improvements derived from Ordnance Survey field activity, are included in each version of Code-Point.

Positional accuracy

Each CPLC is coordinated on the National Grid, with eastings and northings quoted to a resolution of 1 metre. The accuracy of each postcode unit coordinate pair is defined by the PQI, which provides a quality statement of that Code-Point record.

Attribute accuracy

The representation of postcode attributes is checked as part of Royal Mail maintenance of PAF and by Ordnance Survey when coordination and quality assurance of ADDRESS-POINT is carried out during field survey activity.

Logical consistency

Logical consistency is a measure of the degree to which Code-Point data agrees with its specified structure. Data is monitored to ensure that attributes are present in the correct format and in valid combinations.

Completeness

Code-Point contains coordinates for all available postcode units supplied to Ordnance Survey from the Royal Mail PAF. Resources are directed towards continually improving attribute and positional accuracy. Deleted postcodes are not included. Errors and omissions that are identified by customers can be referred to Ordnance Survey for investigation and, where appropriate, onward notification to Royal Mail.

Chapter 4 Creating single-space postcodes

Centroids only

Outward and inward bound representation

The current specification represents the postcodes in a set format which defines the postcodes as having an inward and outward postcode 'code'. Code-Point postcodes have 0, 1 or 2 spaces between the in and out code.

The table below identifies how postcodes are currently shown in the data.

Postcode structure	Number of spaces
AANNNA	0 spaces (represented as AANNNA) for example: PO143RW
ANN NAA	1 space (represented as ANN<>NAA) for example: PO14 3RW
AN NAA	2 spaces (represented as AN<><>NAA) for example: B1 5AP

Single-space postcodes

Currently the Code-Point postcodes are represented as above; however, there may be a user requirement to represent each postcode in a uniformed single-space format.

The aim of this section is to offer some guidance on how to process the Code-Point data to generate postcodes with a single space.

The single-space instructions are applicable to both the postcode point and unit polygon products. Microsoft® Excel®, Microsoft Access, MapInfo® and ESRI® GIS systems have been included to provide guidance when using CSV and other formats.

The underlying theory for all of the methods is principally the same, in that all current spaces are removed and then a single space added before the third character from the right.

NOTE: the NTF format is not included in this chapter as it is not compatible to a single-space format.

CSV single-space postcodes using Microsoft Excel

- Open the CSV file with Excel so the data is displayed in columns.

In a new blank column, click in the first cell of the new column (excluding the row column names).

- In the function line enter in the following function command where A1 is the column containing the postcode:
=TRIM(LEFT(A1,LEN(A1)-3))&" "&RIGHT(A1,3)

This should now produce a column containing postcodes with a single space.

The same method can be employed in MS Access using an update query rather than the function line. The functions listed above are the same for Access and Excel.

MID/MIF and TAB single-space postcodes using MapInfo


The process within MapInfo is the same regardless of whether the original supply is in TAB or MID/MIF as both get imported to MapInfo and opened as a .TAB file.

- First open the Code-Point data in MapInfo and add a new column to hold the formatted postcode.

To add a column to the TAB file.

- Click on *Table, Maintenance, Table Structure*.

This opens the following Modify Table Structure dialogue box:

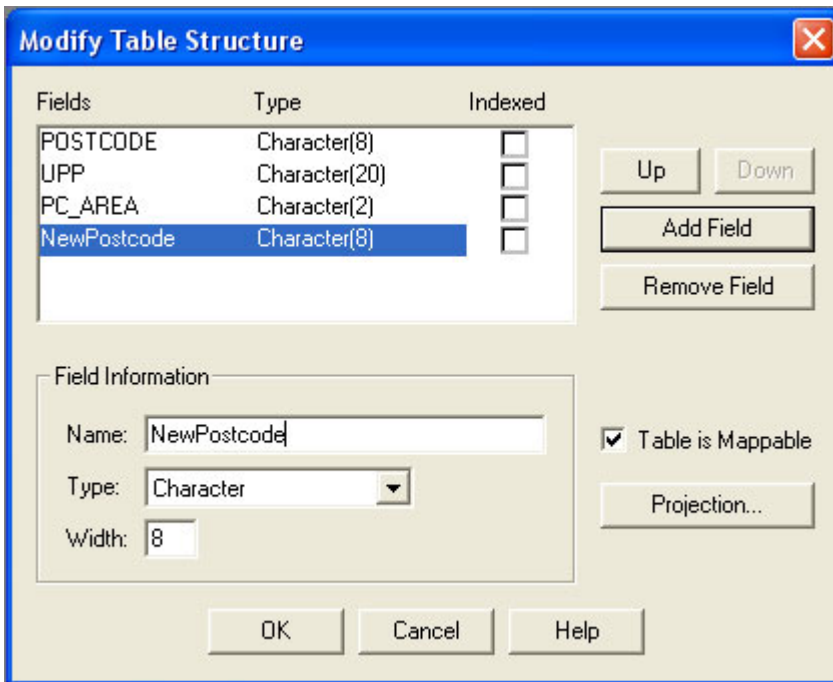

NOTE: if the Add Field / Remove Field buttons are missing then it may be necessary to save a copy of the table and alter the copy.

- Click on *Add Field*.


This adds a field to the end of the table.

- *Name* the new column 'NewPostcode' and give it a *Type* of 'Character' and a *Width* of '8'.
- Click the *OK* button to apply the changes.

The final stage is to update the new column.


- Click *Table* and then the *Update column* tab.

This opens the following dialogue box:

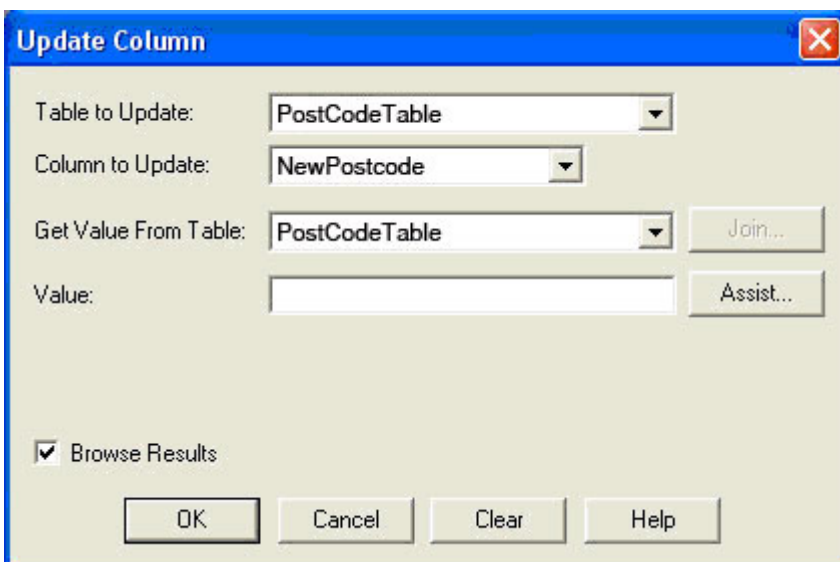

- Ensure that the *Table to Update* field has the name of the table you wish to update as its value.
- From the *Column to Update* drop down menu select the previously added column 'NewPostcode' making sure the *Get Value from Table* is the same table as in the *Table to Update* field.
- Click the *Assist* button.

This opens the following Expression dialogue box:

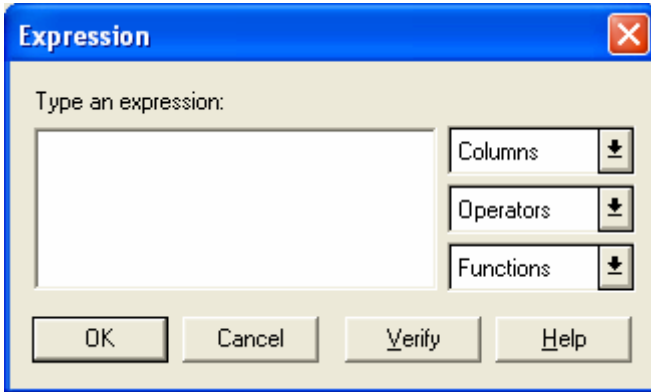

- In the *Type an expression* box key in the following function command:
RTrim\$(Left\$(Postcode,(Len(Postcode)-3))) + " " + Right\$(Postcode,3)
- Click the *OK* button to apply the update.

This will update your new column with a single-space postcode.

Shapefile single-space postcodes using ESRI ArcGIS

These steps are based on the assumption that the data has already been imported into ArcGIS® and that the user has the correct permissions to edit the shapefile. It is advised to try this method on a copy of the original data, and not the only copy of the data, in case of error.


Once the Shapefile is open the required new fields can be added.

- Right click on the layer in the Table of Contents (down the left-hand side of the Map window) and open the Open Attribute Table.

First steps are to add a new column to hold the newly formatted postcode.

- Click on the *Options* button then click on *Add Field*.

This opens the following dialogue box:

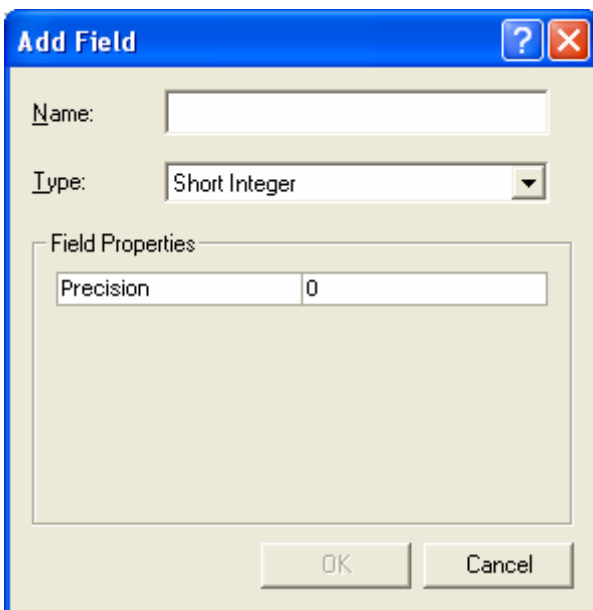


- Key in an appropriate name, for example, 'NewPC' in the *Name* box and change the *Type* box on the drop down menu to 'text', also change the *Field Properties* Precision/Length to '8'.
- Click *OK* and the field is added.

The final stage is to update the new column.

In order to populate the fields the table has to be made editable.


Return to the map window. Do not close the attribute table as it will be required later. Click on the *Editor* drop down selection = ▼.

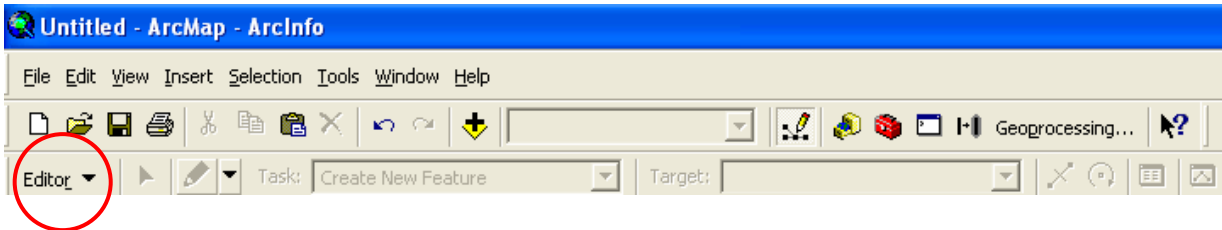

If this tool bar is not already loaded, then right click on an empty part of the grey area on the map window and all the available tool bars will be listed. Simply click on the Editor tool bar and it will be loaded to the toolbar.

- Click the *Editor* drop down and select the first option, *Start Editing*.
- Once *Start Editing* has been selected return to the attribute table.
- Right click on the column name of the column added previously, for example, 'NewPC' and select *Calculate Values*.

This opens the following Field Calculator dialogue box:

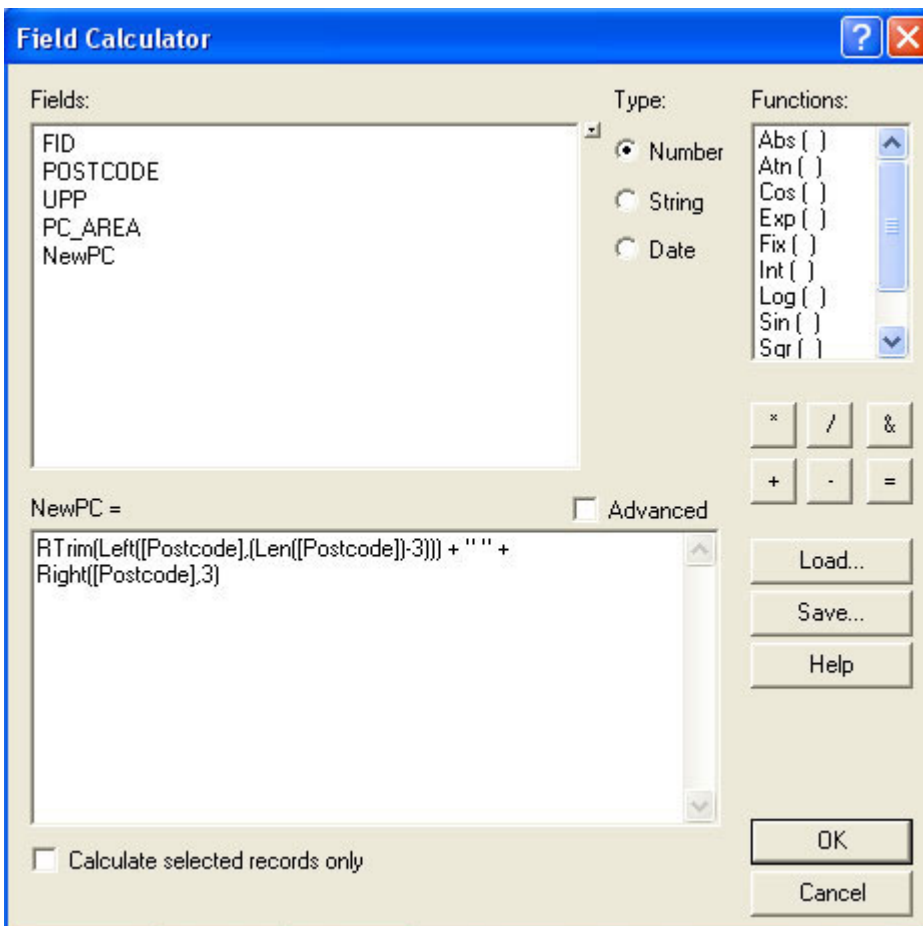

- In the bottom dialog box enter in the following function command:
`RTrim(Left([Postcode],[Len([Postcode])-3])) + " " + Right([Postcode],3)`
- Click *OK* to update the column. This will update your new column with a single-space postcode.

Finally go back to the map window, click on the Editor tool bar and select *Stop editing*. It will prompt to save the edits. Click *Yes*.

Annexe A Product and service performance report form

Ordnance Survey welcomes feedback from its customers about Code-Point.

If you would like to share your thoughts with us, please print a copy of this form and when completed post or fax it to the address below.

Your name:

Organisation:

Address:

.....

.....

Postcode:

Phone:

Fax:

Email:

Quotation or order reference:

Please record your comments or feedback in the space below. We will acknowledge receipt of your form within three (3) working days and provide you with a full reply or a status report within 21 working days.

If you are posting this form, please send it to:

Code-Point Product Manager, Ordnance Survey, Romsey Road, SOUTHAMPTON, SO16 4GU.

If you wish to return it by fax, please dial 023 8079 2615.

Any personal information that you supply with this report form will be used by Ordnance Survey only in the improvement of its products and services. It will not be made available to third parties.

Code-Point

Technical specification

Contents

Section	Page no
Introduction	18
Purpose of this specification and disclaimer	18
Copyright	18
Using this specification	18
Chapter 1	Introducing Code-Point 19
Requirements to utilise Code-Point	19
What you need to use Code-Point	19
Supply definition	19
Update	19
File sizes	19
Code-Point data structure	19
Structure of Code-Point CD-ROM	20
Code-Point content	20
Formats	21
NTF	21
CSV	21
Chapter 2	NTF explained 22
An overview of the data in NTF	22
Introduction	22
Record size	22
Continuation mark {CONT_MARK}	22
Record terminator {EOR}	22
Transfer set	22
Transfer set structure	22
Volume records	22
Database records	22
Section records	23
Supply of data on media	23
Formatted media	23
Chapter 3	Record structures for the transfer of Code-Point in NTF 24
NTF record list	24
Volume Header Record [VOLHDREC] 01	25
Database Header Record [DBHREC] 02	26
Attribute Description Record [ATTDESC] 40	27
Feature Classification Record [FEATCLASS] 05	28
Section Header Record [SECHREC] 07	29
Point Record [POINTREC] 15	30
Geometry Record [GEOMETRY1] 21	31
Attribute Record [ATTREC] 14	32
Volume Terminator Record [VOLTERM] 99	33
Chapter 4	Comma Separated Values (CSV) explained 34
An overview of the data in CSV format	34
Chapter 5	Record structures for the transfer of Code-Point in CSV 35
CSV fields	35
Annexe A	Glossary 37

v2.5 – 08/2008

Introduction

Purpose of this specification and disclaimer

This is the technical specification (hereafter referred to as the specification) referred to in the Framework Direct Licence, Specific Use Framework Partner Licence or your other customer contract.

We may change the information in this specification at any time, giving you the notice period specified in the customer contract made between you and Ordnance Survey.

We do not accept responsibility for the content of any third party websites referenced or accessed in or through this specification, any other contractual documentation, and/or the Ordnance Survey website.

Copyright

This specification, (including for the avoidance of doubt any mapping images reproduced herein), is © Crown copyright 2008. All rights reserved.

Any part of this specification may be copied for use internally in your organisation or business so that you can use Code-Point for the purpose for which it is licensed to your organisation or business (but not otherwise).

No part of this specification may be reproduced or transmitted in any form or by any means (including electronically) for commercial exploitation without the prior written consent of Ordnance Survey.

No part of this specification may be copied or incorporated in products, services or publications that you generate for onward sale, or as free promotional or support materials, without the prior written consent of Ordnance Survey.

Using this specification

The documentation is supplied in portable document format (PDF) only. Free Adobe® Acrobat Reader® software, which displays the specification, incorporates search and zoom facilities and allows you to navigate within. Hyperlinks are used to navigate between associated parts of the specification and to relevant Internet resources by clicking on the blue hyperlinks and the table of contents.

Ordnance Survey is committed to providing customers with consistently high quality geographic information. As such Ordnance Survey regularly applies several data quality measures to the product and the associated documentation. These quality measurements are based on the principles identified in *ISO 19113: 2002 Geographic Information – Quality principles*.

NOTE: according to North America Standards Institute, although ISO 19113:2002 is applicable to digital geographic data, its principles can be extended to many other forms of geographic data such as maps, charts and textual documents.

ISO 19113:2002 does not attempt to define a minimum acceptable level of quality for geographic data.

If you are unfamiliar with any words or terms used and require clarification please refer to the glossary at the end of the document at [annexe A](#) (attached to this specification).

Chapter 1 Introducing Code-Point

Requirements to utilise Code-Point

What you need to use Code-Point

Code-Point is a data product and does not include software for analysis, but can be used with a variety of programs. Code-Point can be loaded onto any desktop PC. Consult your geographical information system (GIS) vendor to establish actual system requirements.

Supply definition

Code-Point is only available as national cover of Great Britain and Northern Ireland and is supplied on CD-ROM containing CDF and NTF data.

Code-Point is available in:

- BS 7567 (NTF v2.0) Level 2; and
- Comma Separated Variables (CSV).

Update

Code-Point is recreated quarterly using updates from Ordnance Survey field surveys and Gridlink® (a consortium made up of Royal Mail® (RM), Ordnance Survey, the Office of National Statistics (ONS), Ordnance Survey of Northern Ireland (OSNI) and the General Register Office for Scotland (GROS)), via ADDRESS-POINT® and Boundary-Line™.

Updates are supplied quarterly. Updates are provided as a complete resupply, but do not include deleted postcodes.

File sizes

File sizes for GB are as follows: NTF 262 Mb CSV 140 Mb

Code-Point data structure

The Code-Point CD-ROM contains two folders in the root directory: Info and Data.


The Info folder contains the following files:

- Readfirst – a file summarising copyright and licensing information that must be read and understood before any data files are opened.
- CD_INFO – a file summarising the content and file structure of the CD-ROM.
- DISCCARE.TXT – a file summarising recommendations on the handling and storage of CD ROMS.
- Codelist.txt – a list of the ONS county, district and ward codes and their full text equivalents derived from Boundary-Line.
- Metadata.txt – lists the numbers of postcode units in each postcode area and the date of the most recent version of the Royal Mail PAF that has been incorporated into the data.

The Data folder contains the following sub-folders:

- CSV – Contains 121 postcode area files in CSV format.
- NTF – Contains 121 postcode area files in NTF.

Structure of Code-Point CD-ROM

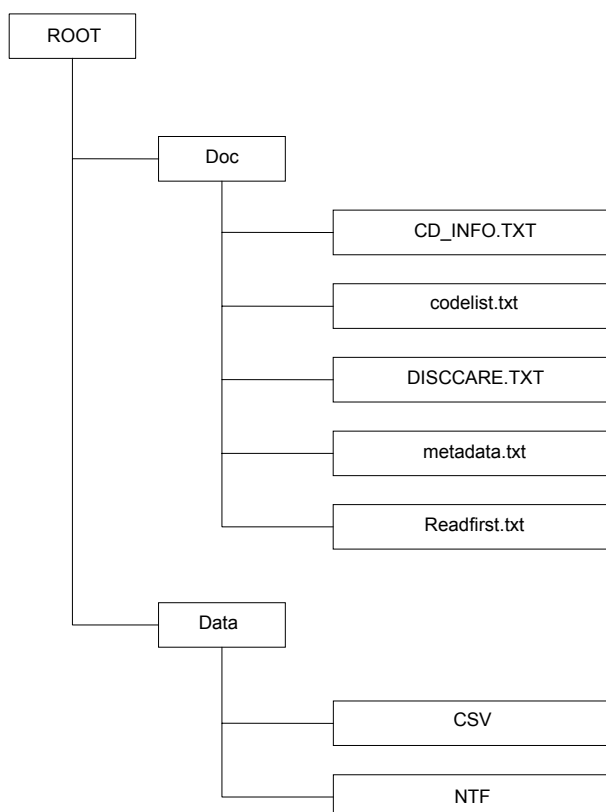

Code-Point content

Code-Point provides the following data:

- administrative county code;
 - administrative district code;
 - administrative ward code;
 - country code;
 - National Grid CPLC;
 - National Health Service regional health authority code;
 - National Health Service health authority code;
 - postcode type;
 - PQI; and
 - postcode unit.
-
- number of delivery points with the same PQI as the postcode unit itself;
 - number of delivery points that are PO boxes;
 - number of domestic delivery points;
 - number of non-domestic delivery points;
 - number of premises with a matched address;
 - number of unmatched delivery points;
 - PO box indicator; and
 - total number of delivery points within postcode unit.

Formats

Code-Point is available in BS 7567 (NTF v2.0) Level 2 and Comma Separated Values (CSV).

NTF

NTF is the standard transfer format for most of Ordnance Survey's digital map data products. Code-Point is supplied in NTF v2.0 Level 2, which has been formally recognised as a British Standard – BS 7567.

For convenience, BS 7567 (NTF v2.0) Level 2 is referred to as NTF throughout. The structure of Code-Point supplied in NTF is described in [chapter 2](#) and [chapter 3](#) of the technical specification.

CSV

CSV is a standard method for delivering data. It is a common interchange format for spreadsheets and databases, and facilitates simplistic use of Code-Point.

For convenience, this is referred to as CSV throughout. The structure of Code-Point supplied in CSV is described in [chapter 4](#) and [chapter 5](#) of the technical specification.

Chapter 2 NTF explained

An overview of the data in NTF

Introduction

This chapter gives an outline of the data structure of Code-Point in NTF. It should be read in conjunction with [chapter 3](#).

There are certain conventions used in the record examples, which are:

- [] Square brackets are placed around record names, for example, [VOLHDREC].
- { } A pair of braces denote field names, for example, {REC_DESC} is the record descriptor field.
- [] 21 A two digit number following square brackets denotes the record descriptor, which uniquely identifies the record name between the brackets.
- <S> This is the space character (ASCII code 32).
- <3S> This denotes three successive space characters.
- % The percentage character (ASCII code 37).

Record size

NTF data is written to the supply media in variable length records, with a maximum physical record length of 80 characters, which includes {CONT_MARK} continuation mark and {EOR} record terminator.

Continuation mark {CONT_MARK}

Continuation records are used where the maximum physical record length of 80 characters does not permit a logical record to be transferred wholly within one physical record. The presence of a continuation record is indicated by the value of the continuation mark {CONT_MARK} that immediately precedes the record terminator {EOR}. The value of {CONT_MARK} is 1 if there is a continuation record present and 0 if there is not.

Record terminator {EOR}

The last character of each physical record is the end of record terminator, which is the percent character (%) (ASCII 37).

Transfer set

A transfer set normally equates to a single file.

Transfer set structure

Volume records

Each transfer set starts with a compulsory Volume Header Record [VOLHDREC] and terminates with a compulsory Volume Terminator Record [VOLTERM].

Database records

Database records transfer information common to all data and their presentation in the subsequent section(s). An NTF transfer set will comprise one database. The database commences with a Database Header Record [DBHREC], which sets up the database. It will be followed by a number of Attribute Description Records [ATTDESC] and Feature Classification Records [FEATCLASS].

Database Header Record [DBHREC]

This mandatory record indicates the commencement of a database and gives details of:

- the database name;
- NTF release date;
- the supply option; and
- creation date that applies to the whole transfer set.

Attribute Description Record [ATTDESC]

These records list and give descriptions of the attributes that can be applied to the features within the transfer set.

Feature Classification Record [FEATCLASS]

These records list and give descriptions of the feature codes that can be present within the transfer set.

Section records

The section records contain the Code-Point data within the postcode area being transferred by that section. It starts with the Section Header Record [SECHREC] and is followed by a number of Section Data Records that contain data on all the postcode units within the section. In Code-Point these data records consist of a sequence of three logical records, which is repeated for each postcode unit within the section.

Section Header Record [SECHREC]

This mandatory record starts a section. It contains information and parameters essential for understanding, interpreting and processing some of the fields within the data. It establishes the unit of measure for X and Y coordinates, origins and other constants.

Point Record [POINTREC]

This record identifies the start of the data for a single postcode unit and contains a feature serial number that is unique within any one section.

Geometry Record [GEOMETRY1]

This record contains the coordinate position of the postcode unit identified in the previous point record. All coordinate values within Code-Point are given with a precision of 1 metre.

Attribute Record [ATTREC]

The Attribute Record gives the attributes or details of the postcode unit, for example, the postcode itself, PQI and so on. This logical record may have one or more continuation records to transfer all the attribute information.

Supply of data on media

Formatted media

Data requested on logically formatted media such as CD ROM, as defined by current Ordnance Survey product specifications, will be written directly to the output device. The data files will be written to the medium sequentially.

See also [chapter 3](#) in the technical specification.

Chapter 3 Record structures for the transfer of Code-Point in NTF

NTF record list

This list comprises the valid record types used in the Code-Point NTF transfer set.

Descriptor	Description	Record name
01	Volume Header Record – defines the donor and data type.	[VOLHDREC]
02	Database Header Record – transfers data about the database.	[DBHREC]
40	Attribute Description Record – defines attribute descriptions and their fields.	[ATTDESC]
05	Feature Classification Record – defines data classifications.	[FEATCLASS]
07	Section Header Record – coordinate and structure types, unit scale factors and so on.	[SECHREC]
15	Point Record – identifies the definition of a postcode unit.	[POINTREC]
21	Geometry Record – defines the two-dimensional geometry for a postcode unit.	[GEOMETRY1]
14	Attribute Record – defines the attributes or details of a postcode unit.	[ATTREC]
99	Volume Terminator Record – defines the end of the transfer set.	[VOLTERM]

Volume Header Record [VOLHDREC] 01

Field	Position	Format	Value example	Description
REC_DESC	01:02	A2	01	Record type identifier
DONOR	03:22	A20	ORDNANCE SURVEY<5S>	
RECIPIENT	23:42	A20	<20S>	Not used
TRANDATE	43:50	D8	20051110	Date of processing CCYYMMDD
SERIAL	51:54	I4	0000	Customer sequence number
VOLNUM	55:56	I2	01	Volume number (always 01)
NTFLEVEL	57:57	I1	2	NTF Level 2
NTFVER	58:61	R4,2	0200	NTF Version 2.00
NTFOR	62:62	A1	V	Variable length records
EOR	63:63	A1	%	Sets {EOR} to % on formatted media
DIVIDER	64:64	A1	\	Divider used to terminate variable length text fields
CONT_MARK	65:65	I1	0	No continuation record
EOR	66:66	A1	%	Record terminator

Record example:

01ORDNANCE SURVEY										2005111000000120200V \0%									
....1....2....3....4....5....6....7....8		1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890

Template

Database Header Record [DBHREC] 02

Field	Position	Format	Value example	Description
REC_DESC	01:02	A2	02	Record type identifier
DBNAME	03:22	A20	CODE_POINT_2005.4.0<S>	Database name – Code-Point dataset version
DDNAME	23:42	A20	DEFAULT_02.00<7S>	Standard NTF data dictionary name
DDDATE	43:50	D8	19920515	Date of standard data dictionary
DDBASE	51:70	A20	<20S>	Not used
DDBDATE	71:78	D8	00000000	Not used
CONT_MARK	79:79	A1	1	Continuation record follows
EOR	80:80	A1	%	Record terminator

Continuation of Database Header Record

Field	Position	Format	Value example	Description
REC_DESC	01:02	A2	00	Continuation record identifier
FCNAME	03:22	A20	CODE_POINT_03.02<4S>	Code-Point specification version 3.02 (see note)
FCDATE	23:30	D8	20051104	Creation date of dataset
DQNAME	31:50	A20	<20S>	Not used
DQDATE	51:58	D8	00000000	Not used
DATA_MODEL	59:60	I2	02	Data model type – spaghetti
CONT_MARK	61:61	A1	0	No continuation record
EOR	62:62	A1	%	Record terminator

NOTES: the Code-Point specification version number gives the major version before the decimal point (3 in the above example) and after it the supply option (2 in the example).

CODE_POINT_03.02 = Code-Point product

Record example:

```
02CODE_POINT_2002.1.0 DEFAULT_02.00      19920515      000000001%
00CODE_POINT_03.02      19990401      00000000020%
```

....1....2....3....4....5....6....7....8
1234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890								
....

Template

Attribute Description Record [ATTDESC] 40

Field	Position	Format	Value example	Description
REC_DESC	01:02	A2	40	Record type identifier
VAL_TYPE	03:04	A2	PR	Attribute mnemonic, for example, PO box indicator
FWIDTH	05:07	A3	001 or <3S>	Fixed width of attribute or three spaces if variable width
FINTER	08:12	A5	A1<3S>	Interpretation of field (A* if variable width)
ATT_NAME	13:*	A*	PO box indicator	Name given to attribute
DIVIDER	*:*	A1	\	
CONT_MARK	*:*	A1	0	No continuation record
EOR	*:*	A1	%	Record terminator

NOTES: an attribute description will be needed to describe all attributes used in Code-Point data. All the attributes that may appear within the data are given in the record examples below.

Record examples:

40PC007A7 Postcode unit\0%
 40PQ002I2 Positional quality indicator\0%
 40PR001A1 PO box indicator\0%
 40TP003I3 Total number of delivery points\0%
 40DQ003I3 Delivery points with same PQI as unit itself\0%
 40RP003I3 Domestic delivery points\0%
 40BP003I3 Non-domestic delivery points\0%
 40PD003I3 PO box delivery points\0%
 40MP003I3 Matched address premises\0%
 40UM003I3 Unmatched delivery points\0%
 40CY003I3 Country code\0%
 40RH003A3 NHS regional health authority code\0%
 40LH003A3 NHS health authority code\0%
 40CC002A2 Administrative county code\0%
 40DC002A2 Administrative district code\0%
 40WC002A2 Administrative ward code\0%
 40LS001A1 Postcode type\0%

....1....2....3....4....5....6....7....8
1234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890								
....

Template

Feature Classification Record [FEATCLASS] 05

Field	Position	Format	Value example	Description
REC_DESC	01:02	A2	05	Record descriptor
FEAT_CODE	03:06	I4	2801	Feature code
CODE_COM	07:16	A10	<10S>	Not used
STCLASS	17:36	A20	<20S>	Not used
FEATDES	37:*	A*	Postcode unit Point	Textual description of feature classification
DIVIDER	*:*	A1	\	Divider used to terminate variable length fields
CONT_MARK	*:*	I1	0	No continuation record
EOR	*:*	A1	%	Record terminator

* = variable integer.

Record example:

052801	Postcode unit Point\0%															
.....1.....2.....3.....4.....5.....6.....7.....8									
1234567890123456789012345678901234567890123456789012345678901234567890123456789012345678901234567890																
.....

Template

Geometry Record [GEOMETRY] 21

Field	Position	Format	Value example	Description
REC_DESC	01:02	A2	21	Record type identifier
GEOM_ID	03:08	16	000000	Not used
GTYPE	09:09	A1	1	Defines point geometry
NUM_COORD	10:13	14	0001	Number of coordinate pairs
X_COORD	14:20	17	0272530	Easting
Y_COORD	21:27	17	0196956	Northing
QPLAN	28:28	A1	<S>	Not used
CONT_MARK	29:29	A1	0	No continuation record or
			1	continuation record follows
EOR	30:30	A1	%	Record terminator

Postcodes that have no coordinated position will be given zero coordinates ('00000000000000') and the positional quality indicator in the accompanying Attribute Record will be set to '0'.

Record examples:

2100000001000102725300196956 0%

.....1.....2.....3.....4.....5.....6.....7.....8
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
.....

Template

Attribute Record [ATTREC] 14

Field	Position	Format	Value example	Description
REC_DESC	01:02	A2	14	Record type identifier
ATT_ID	03:08	I6	000000	Not used
VAL_TYPE	09:10	A2	PC	Attribute mnemonic
VALUE	11:*		SO515RU	Attribute value
CONT_MARK	*:*	A1	0 1	No continuation record or continuation record follows
EOR	*:*	A1	%	Record terminator

The pair of fields {VAL_TYPE} and {VALUE} will repeat to specify all the attributes required. It may be necessary to utilise a continuation record to specify all attributes.

The Attribute Record will contain all or some of the following fields:

Attribute mnemonic	Description	Fixed or variable	Size
PC	Postcode unit	F	A7
PQ	Positional quality indicator	F	I2
PR	PO box indicator	F	A1
TP	Total number of delivery points	F	I3
DQ	Delivery points – used to create the CPLC where PQI value is 10 or 20	F	I3
RP	Domestic delivery points	F	I3
BP	Non-domestic delivery points	F	I3
PD	PO box delivery points	F	I3
MP	Matched address premises	F	I3
UM	Unmatched delivery points	F	I3
CY	Country code	F	I3
RH	NHS regional health authority code	F	A3
LH	NHS health authority code	F	A3
CC	Administrative county code	F	A2
DC	Administrative district code	F	A2
WC	Administrative ward code	F	A2
LS	Postcode type	F	A1

Attributes with null data will be omitted from this record.

Each of the attribute mnemonics will be defined in an Attribute Description Record [ATTDESC] 40 at the start of the transfer set.

Record example:

```
14000000PCSO515RUPQ3PRNTP017DQ017RP017BP000PD000MP017UM000RV19990215RHY06LHQD31%
00CC24DCUNWCFW0%
```

.....1.....2.....3.....4.....5.....6.....7.....8
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
.....

Template

Volume Terminator Record [VOLTERM] 99

Field	Position	Format	Value example	Description
REC_DESC	01:02	A2	99	Record type identifier
FREE_TEXT	03: *	A*	*	Message (see note below)
CONT_VOL	*.*	I1	0	No continuation volume follows
EOR	*.*	A1	%	Record terminator

NOTE: the FREE_TEXT field will comprise the message: End Of Transfer Set.

Record example:

99End Of Transfer Set0%

....1....2....3....4....5....6....7....8
1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890	1234567890
....

Template

Chapter 4 Comma Separated Values (CSV) explained

An overview of the data in CSV format

CSV is a de facto standard method for delivering data. This is provided to suit customers requiring a simple business use. CSV can be used in a word-processing package or presented as a spreadsheet. Code-Point information in CSV is held within individual fields. Each field is either textual, for example, SO515RU, or numeric, for example, 21. Within CSV each field is separated from the next by a comma. If the field is textual, then the text is enclosed in double quotes, for example, "SO515RU".

This method of representation can also be referred to as a Comma Delimited File (CDF). All coordinate values within Code-Point are given with a precision of 1 metre.

See also [chapter 5](#).

Chapter 5 Record structures for the transfer of Code-Point in CSV

CSV fields

The CSV will contain the following fields separated by commas in the following order:

Mnemonic	Description	Format	Size	Description
PC	Postcode unit	A7	7	
	Field separator	A1	1	,
PQ	Positional quality indicator	I2	1	
	Field separator	A1	1	,
PR	PO box indicator	A1	1	
	Field separator	A1	1	,
TP	Total number of delivery points	I3	*	
	Field separator	A1	1	,
DQ	Delivery points – used to create the CPLC where the PQI value is 10 or 20	I3	*	
	Field separator	A1	1	,
RP	Domestic delivery points	I3	*	
	Field separator	A1	1	,
BP	Non-domestic delivery points	I3	*	
	Field separator	A1	1	,
PD	PO box delivery points	I3	*	
	Field separator	A1	1	,
MP	Matched address premises	I3	*	
	Field separator	A1	1	,
UM	Unmatched delivery points	I3	*	
	Field separator	A1	1	,
EA	Eastings	I6	*	
	Field separator	A1	1	,
NO	Northings	I7	*	
	Field separator	A1	1	,
CY	Country code	I3	3	
	Field separator	A1	1	,
RH	NHS regional health authority code	A3	3	
	Field separator	A1	1	,
LH	NHS health authority code	A3	3	
	Field separator	A1	1	,
CC	Administrative county code	A2	2	
	Field separator	A1	1	,
DC	Administrative district code	A2	2	
	Field separator	A1	1	,
WC	Administrative ward code	A2	2	
	Field separator	A1	1	,
LS	Postcode type	A1	1	

Those fields containing text, that is, alphanumerics (A), will be enclosed by double quotes, which have not been included in the sizes listed above.

Fields with null data will appear as " " for text or 0 for a numeric.

Each record will be terminated with a carriage return character (ASCII 13) and a line feed character (ASCII 10).

Examples of a Code-Point CSV record:

"SO515RU",10,"N",17,17,17,0,0,17,0,437015,120914,064,"Y06","QD3","24","UN","FW","S"

Annexe A Glossary

The purpose of this section is to provide a glossary of terms used in the definition of products, services, licensing and other terms and conditions for Code-Point. Where terms refer to other terms within the glossary, they are connected by means of hot links to the relevant entries.

addressed premise

A permanent or non permanent building structure with an address being a potential delivery point for Royal Mail.

Examples of an addressed premise would be: a house, a flat within a block of flats, a caravan site, a bollard to which several houseboats may be moored, or an organisation occupying the whole of a building.

ADDRESS-POINT

An Ordnance Survey addressing product that relates Royal Mail [Postcode Address File](#) (PAF) addressed properties within Great Britain to the [National Grid](#).

area-based postcode

A type of [large-user postcode](#) that is allocated to a small number of organisations who receive an exceptionally large amount of mail. These postcodes still relate to a geographical area but may overlap other sector areas or be scattered.

building

A physical, walled structure connected to foundations that has, or will have, a roof. This definition includes buildings surveyed at foundation stage.

CPLC (Code-Point location coordinate)

A [National Grid reference](#) for each [postcode unit](#). It is a two-dimensional coordinated point to a resolution of 1 metre. Coordinates are attributed from GRIDLINK using an accuracy hierarchy.

Country code

The code used by Office of National Statistics to indicate the country in which the Code-Point georeference lies. This has replaced the PAF update date field.

Country	Code
England	064
Scotland	179
Wales	220
N Ireland	152

Comma Separated Values (CSV)

The CSV file format is commonly used to exchange data between different applications, for example, Microsoft Excel and Access. Being text files, CSV files can also be viewed in *Notepad*.

delivery point

A Royal Mail-defined point to which mail is delivered. This may be a property (private address), organisation, mailbox or even the name of an individual. These categories are derived from *The Complete Guide to Postcode Products* from Royal Mail. This is distinct from the addressed premise because there may be more than one organisation at an address.

Gridlink

Gridlink is the name given to a joined up government initiative involving Royal Mail, the Office for National Statistics, the General Registry Office for Scotland, Ordnance Survey of Northern Ireland and Ordnance Survey. All these organisations are involved in the georeferencing of postcodes and the relating of postcodes to administrative and National Health areas and so on.

inward code or incode

See [postcode](#).

Land-Line

Ordnance Survey's definitive product range of large scale maps in digital form. Land-Line has a vector (point and line) structure that collectively forms 36 feature codes, with a further 27 feature codes in Land-Line.Plus®, representing an accurate and detailed representation of the real world.

large-user postcode

A large-user postcode is allocated when:

- a firm or business at a new address regularly receives, in any one day, 25 or more items of mail in a town area or 50 or more items in a rural area;
- a private box (PO box) is provided;
- Royal Mail Selectapost service is provided;
- a Business Reply or Freepost licence is taken out; or
- all Freepost and Business Replies have their own postcode.

matched address

An address, resulting from a match between the Land-Line address data and the PAF, which has been allocated a coordinate position. The match may be a result of either manual or automatic matching, the latter encompassing both full and fuzzy logic matching.

National Grid reference (NGref)

The National Grid provides a unique reference system that can be applied to all Ordnance Survey maps of Great Britain. The map of Great Britain is covered by 100 km by 100 km grid squares, with the origin lying to the west of the Isles of Scilly. When a National Grid reference is quoted, the easting (left to right direction) is always given before the northing (upwards direction).

A National Grid reference (to 1 metre) will identify the spatial position of the CPLC.

non-geographic postcodes

Special non-geographic postcodes are allocated to single organisations who receive an exceptionally large amount of mail. These are included in Code-Point.

National Transfer Format (NTF)

A vector interchange format used to distribute digital map products from Ordnance Survey that conforms to BS 7567 (Electronic transfer of geographic information (NTF)).

outward code or outcode

See [postcode](#).

PAF (Postcode Address File)

The PAF was created when all the separately held information was assembled and stored on a Royal Mail central computer system. PAF now contains the postal addresses and postcodes of approximately 26 million delivery points in Great Britain, including approximately 222 000 [large users](#).

positional quality (PQ)

The positional quality is a flag to indicate the positional accuracy of the Gridlink coordinates allocated to each postcode record.

All postcodes are to 1 m resolution, but Gridlink will seek to provide the most accurate coordinates according to the hierarchy detailed in the following table.

Status value	Description of status values
1	Automatically calculated to be within the building of the matched address closest to the postcode mean.
2	As for status value 1, except by visual inspection of Land-Line maps.
3	Approximate to within 50 m of true position.
4	Postcode unit mean – (mean of matched addresses with the same postcode, but not snapped to a building).
5	Postcode imputed by ONS by reference to surrounding known postcodes.
6	Postcode sector mean – mainly PO boxes.
8	Postcode terminated. No postcodes of this type will be provided by Gridlink, nor should they be provided to Gridlink. Consortium members may wish to hold this information for historical purposes. The accuracy of the data is as indicated by its status value immediately prior to its termination.
9	No coordinates available.

postal address

A postal address is a delivery point that is currently receiving mail. There may be many delivery points within an individual building structure as shown in Land-Line data.

postcode

An abbreviated form of address made up of combinations of between five and seven alphanumeric characters. A postcode may cover between 1 and 100 addresses. The average number of addresses per postcode is 15.

There are two main components of a postcode:

- The outward code (also called outcode). The first two to four characters of the postcode constituting the postcode area and the postcode district. It is the part of the postcode that enables mail to be sent from the accepting office to the correct area for delivery.
- The inward code (also called incode). The last three characters of the postcode constituting the postcode sector and the postcode unit. It is used to sort mail at the local delivery office.

For example:

Outward		Inward	
NW	6	4	DP
			Unit
		Sector	
	District		
Area			

postcode area

An area given a unique alphabetic coding by Royal Mail to facilitate the delivering of mail. The area is identified by one or two alpha characters at the start of the full postcode, the letters being derived from a town, city or district falling within the postcode area. There are at present 120 postcode areas in Great Britain, for example, SO for Southampton, MK for Milton Keynes, B for Birmingham or W for London West. The postcode area code constitutes the first part of the outward code.

postcode district

A sub-area of the postcode area, specified by the character sub-string within the first half of a full postcode, which may be numeric, alphabetic or alphanumeric; for example, 42 from MK42 6GH or 1A from W1A 4WW. There are approximately 2800 postcode districts in Great Britain.

NOTE: there are certain non-geographic districts. In these instances a district code is allocated to cover all large users in the postcode area.

postcode sector

A sub-area of a postcode district whose area is identified by the number third from the end of a full postcode. There are approximately 9000 postcode sectors in Great Britain. An example of a postcode sector code is 3 from GU12 3DH.

postcode unit

A sub-area of a **postcode sector**, indicated by the two letters of the **inward postcode**, which identifies one or more **small-user postcode** delivery points or an individual **large user postcode**. There are approximately 1.7 million postcode units in the UK.

Post office (PO) box

Generally, a non-geographic address allocated with a number by the Post Office®. PO boxes within ADDRESS-POINT are now matched to the Royal Mail delivery office at which they are based (except in the BT postcode area), rather than the average of matched addresses within the postcode sector. This will enable PO boxes to be matched with a PQI value of 10.

Postzon

A file marketed by Royal Mail that allocates a [National Grid reference](#) to each postcode unit. This coordinate is derived from a 100 metre square that contains the first of the range of addresses that form the postcode unit.